

1/5

10


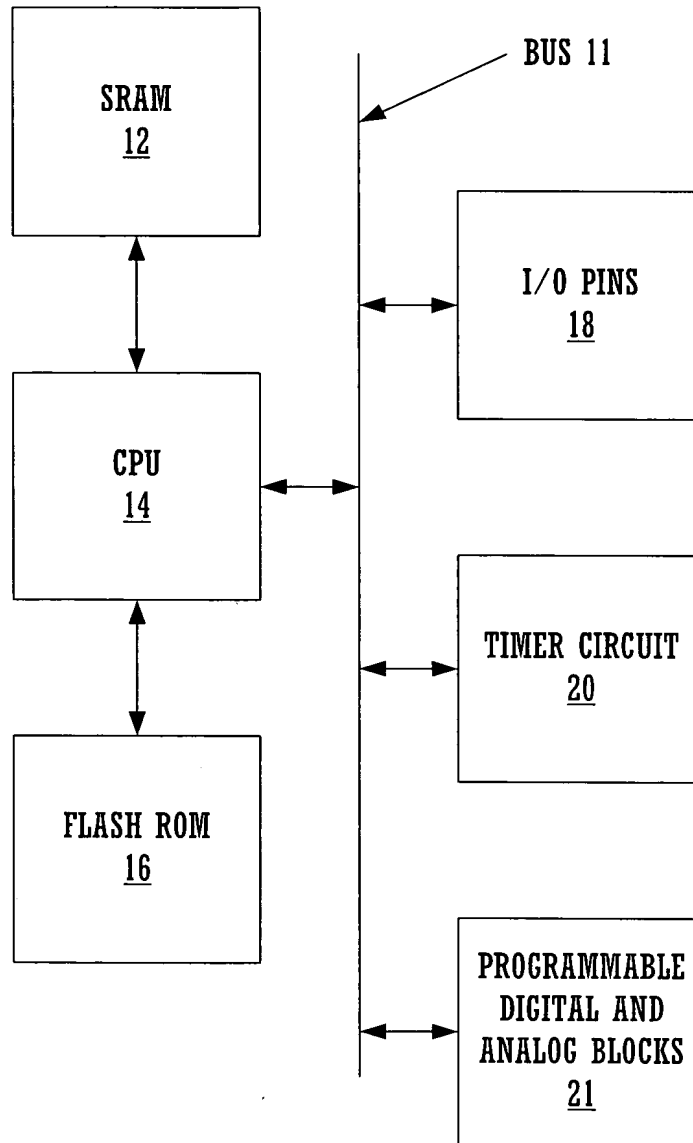


FIGURE 1



2/5

200


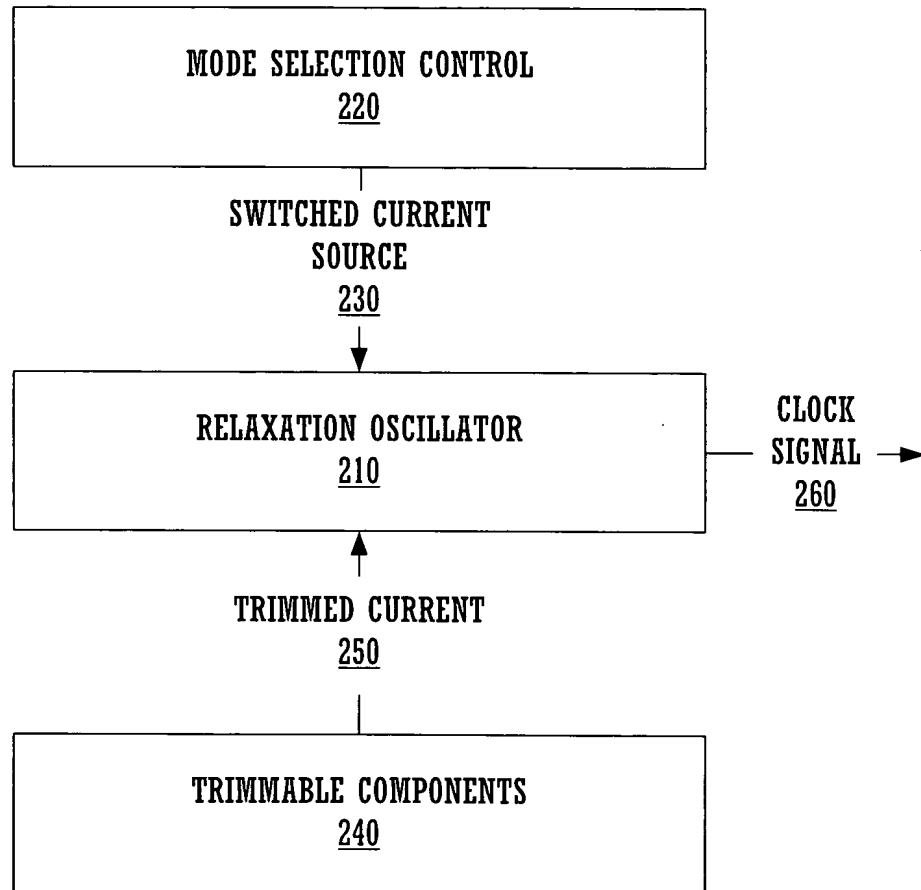


FIGURE 2



3/5

300

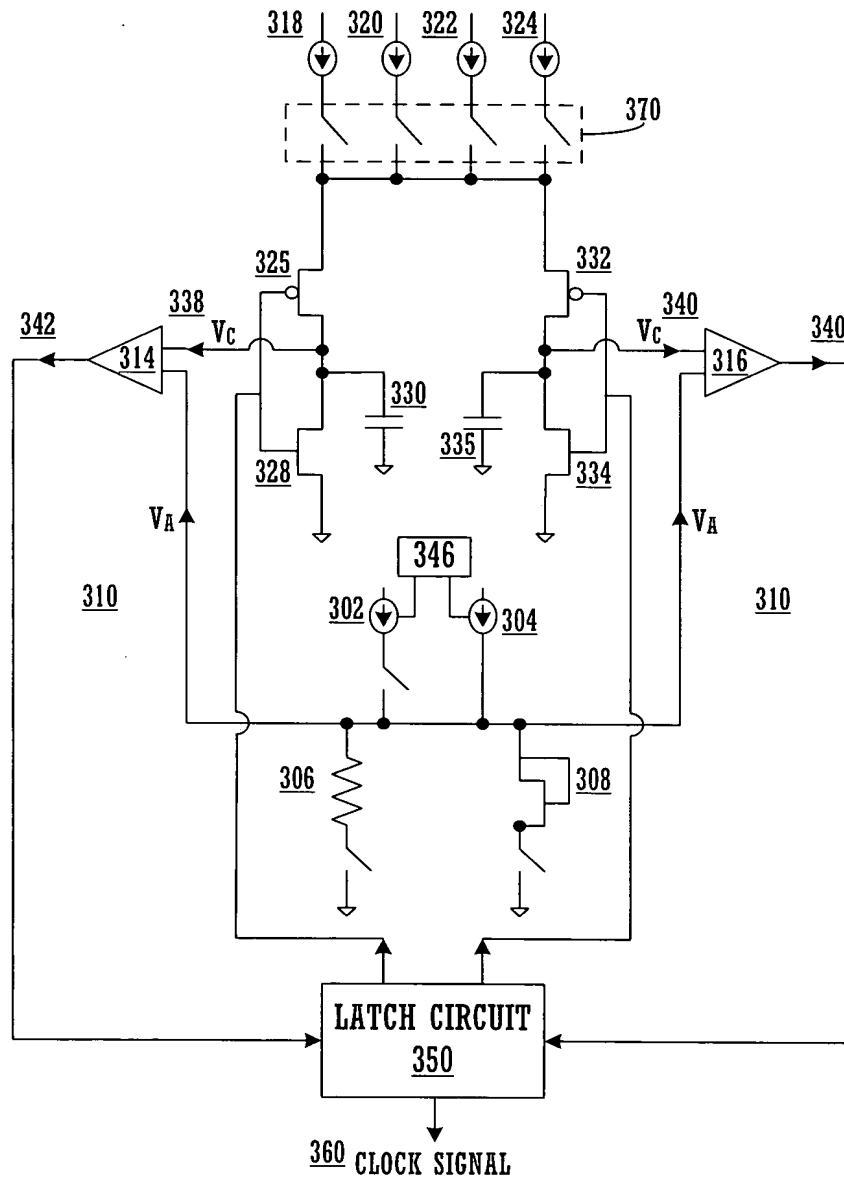


FIGURE 3



4/5

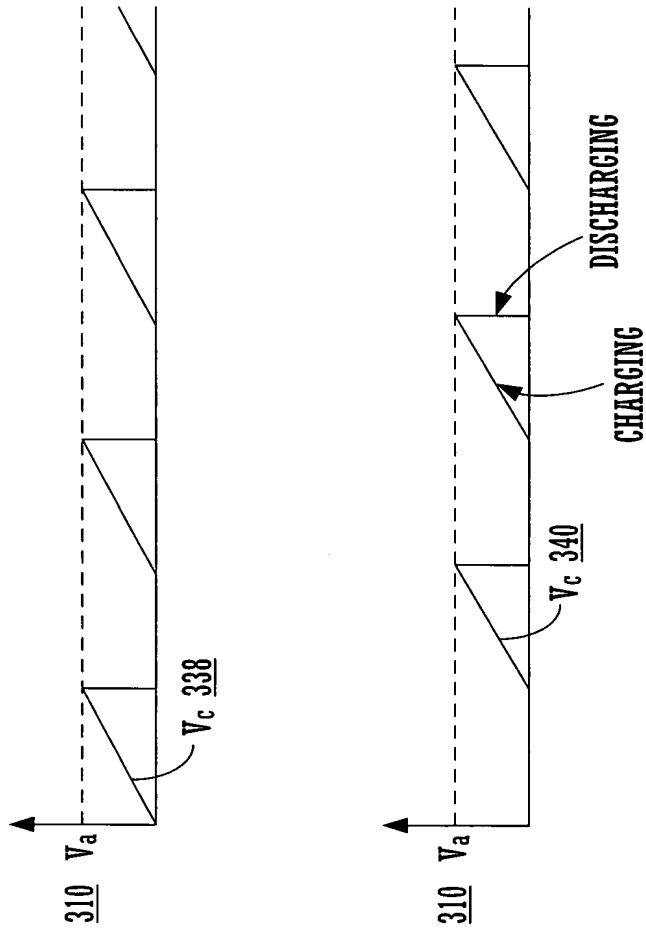


FIGURE 4



5/5

500

SELECTING A MODE OF OPERATION CORRESPONDING
TO A SWITCHED CURRENT SOURCE

510



GENERATING A REFERENCE VOLTAGE BASED ON
THE SWITCHED CURRENT SOURCE

520



IN RESPONSE TO SAID REFERENCE VOLTAGE, USING
THE RELAXATION OSCILLATOR CIRCUIT TO
GENERATE A CLOCK SIGNAL

530

FIGURE 5